

NOTE


CEMENT MIX PLACED OVER AND AROUND PIPE. TAMPED INTO PLACE BEFORE PLACING BACKFILL. USE 10% CEMENT WITH 90% NATIVE SOIL AND WATER TO SUIT, TO FORM A DRY MIX THAT WILL HOLD IT'S SHAPE WHEN MOLDED INTO A BALL. SOIL CEMENT MIX REQUIRED ON SLOPES 0.20 FT/FT OR GREATER.

SLOPE

0.20 ft/ft to 0.35 ft/ft
 0.36 ft/ft to 0.50 ft/ft
 0.50 ft/ft or GREATER

MAX SPACING

36' Center to Center
 24' Center to Center
 16' Center to Center

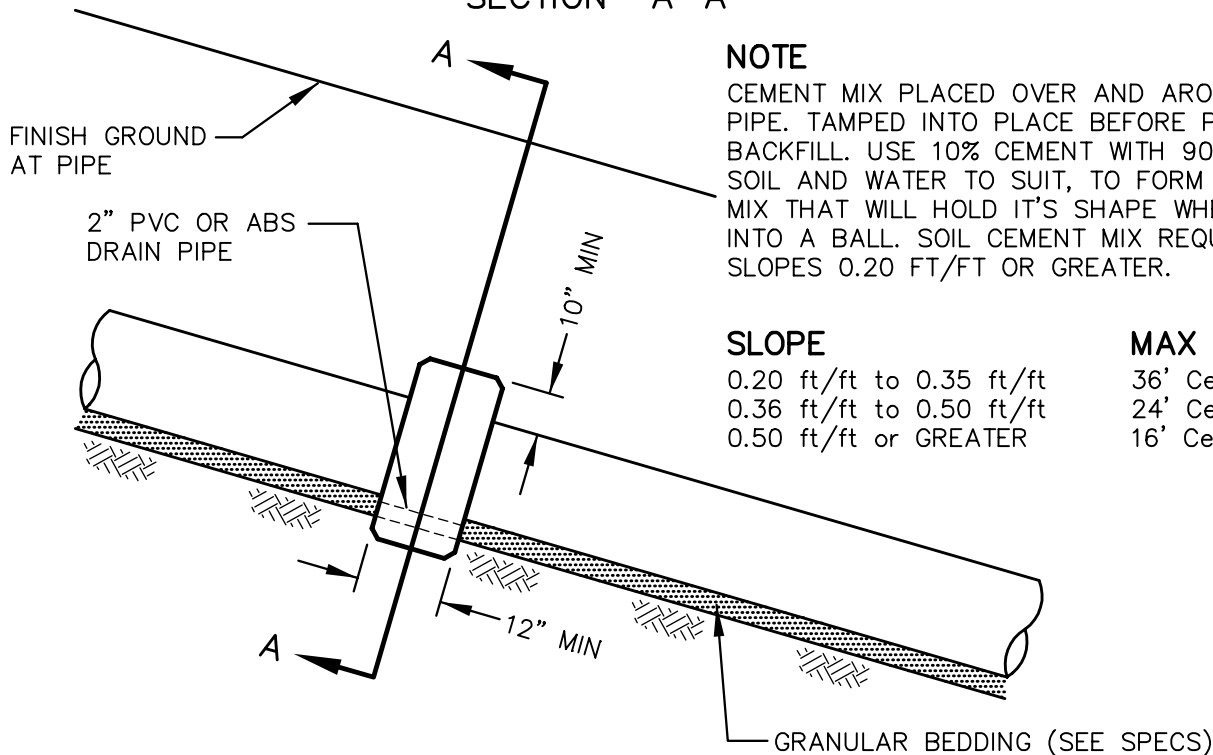

S8 SEWER MAIN PIPE ANCHOR
 NTS City of Yakima - Engineering Division

APPROVED: 2.10.99